

Led panels

Pyxis

Back-lit led panel 60x60 and 30x120, UGR<19, flicker-free. Housing in anodised white painted aluminium. Opal micro-prismatic diffuser in PMMA with high transmittance, uniform luminance and anti-glare surface. Suitable for recessed and surface mounting by means of the relevant accessories (IP40). ON/OFF and DALI versions available, supply tension 220-240V 50/60Hz.

INSTALLATION







TECHNICAL DETAILS



Pyxis 60x60



Pyxis 30x120

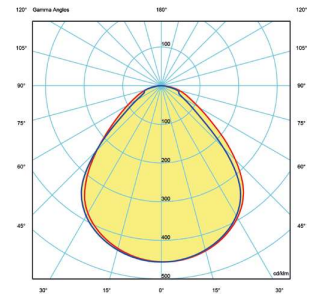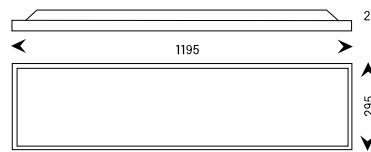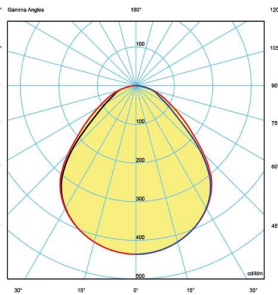

Versions

60x60 3000/4000 K

60x60 DALI 3000/4000 K

30x120 3000/4000 K

30x120 DALI 3000/4000 K

Optional accessories

Frame for ceiling mounting

Clips for recessed mounting

Emergency kit 3h





Dimension (mm)	Power	Kelvin	Output	Efficiency	Dimmable driver	Colour	Code	
60x60 595x595xh29	36 W	3000 K	3648 lm	101 lm/W	---	White	0408.184G	1
	36 W	4000 K	3948 lm	110 lm/W	---	White	0408.182G	1
	36 W	3000 K	3648 lm	101 lm/W	DALI2_PUSH	White	0408.17DG	1
	36 W	4000 K	3948 lm	110 lm/W	DALI2_PUSH	White	0408.17FG	1
30x120 295x1195xh29	36 W	3000 K	3816 lm	106 lm/W	---	White	0409.184G	1
	36 W	4000 K	4104 lm	114 lm/W	---	White	0409.182G	1
	36 W	3000 K	3816 lm	106 lm/W	DALI2_PUSH	White	0409.17DG	1
	36 W	4000 K	4104 lm	114 lm/W	DALI2_PUSH	White	0409.17FG	1



Pyxis 60x60
with frame



OPTIONAL ACCESSORIES To be ordered separately

Picture	Description	Code	1
	White aluminium frame 600x600x74mm for surface mounting for Pyxis 60x60	0400.0019	1
	White aluminium frame 300x1200x74mm for surface mounting for Pyxis 30x120	0400.0020	1
	Clips for recessed mounting for Lynx/Pyxis 60x60 and 30x120	0400.0017	1
	Emergency Kit 3h for Lynx/Pyxis IP20	0400.0021	1