



CE	IP65
LED	RG1
CRI 80	Driver incl.
L80 B10	Mac Adam 3
50000H	



# RAGGIO SPOT

Z. COLOR

grigio metallizzato / metallic grey - 50 

D. 18° 1


36° 2

60° 3

CR180 5


4000K 7

3000K 8

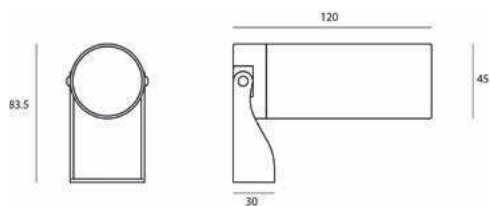

CODICE / CODE	W	K	LM	FASCIO / BEAM
LAA.5107. D 5 7. Z	7W/230V LED	4000	840	18°/36°/60°
LAA.5107. D 5 8. Z	7W/230V LED	3000	793	18°/36°/60°

## ACCESSORI / ACCESSORIES



**LAA.SP**  
Picchetto Inox.  
Inox Spike.



**AAA.CN3**  
Connettore IP68, 3vie.  
IP68 waterproof connector, 3way.



**LAA.AS**  
Asta h.300mm con picchetto.  
Rod h.300mm with spike.



**AAA.CN4**  
Connettore IP68, 4vie.  
IP68 waterproof connector, 4way.